ION ROD SUSPENDED

IP20

NM/MM

6 WARRANTY

KG 1.5

230v

1W

DALI

EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2



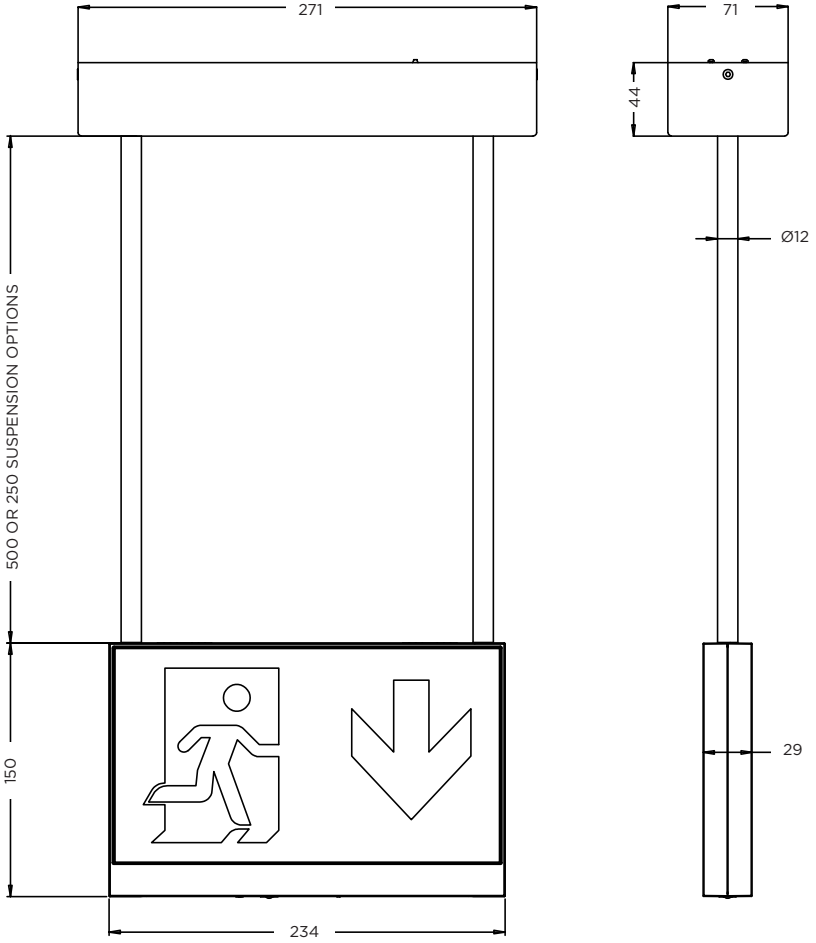

ION ROD SUSPENDED

IP20

NM/MM

6 WARRANTY

KG 1.5

230v

1W

DALI

EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2



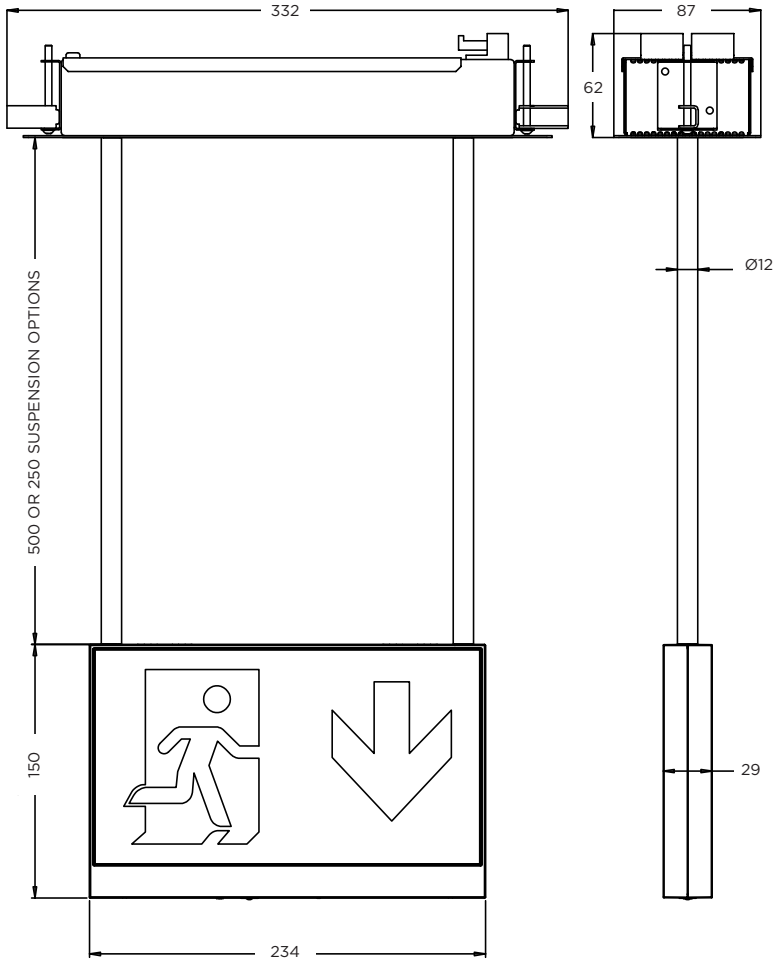

ION WIRE SUSPENDED

MADE IN BRITAIN

UK CA CE

IP20

NM/MM

6 WARRANTY

KG 1.5

230v

1W

DALI

EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2



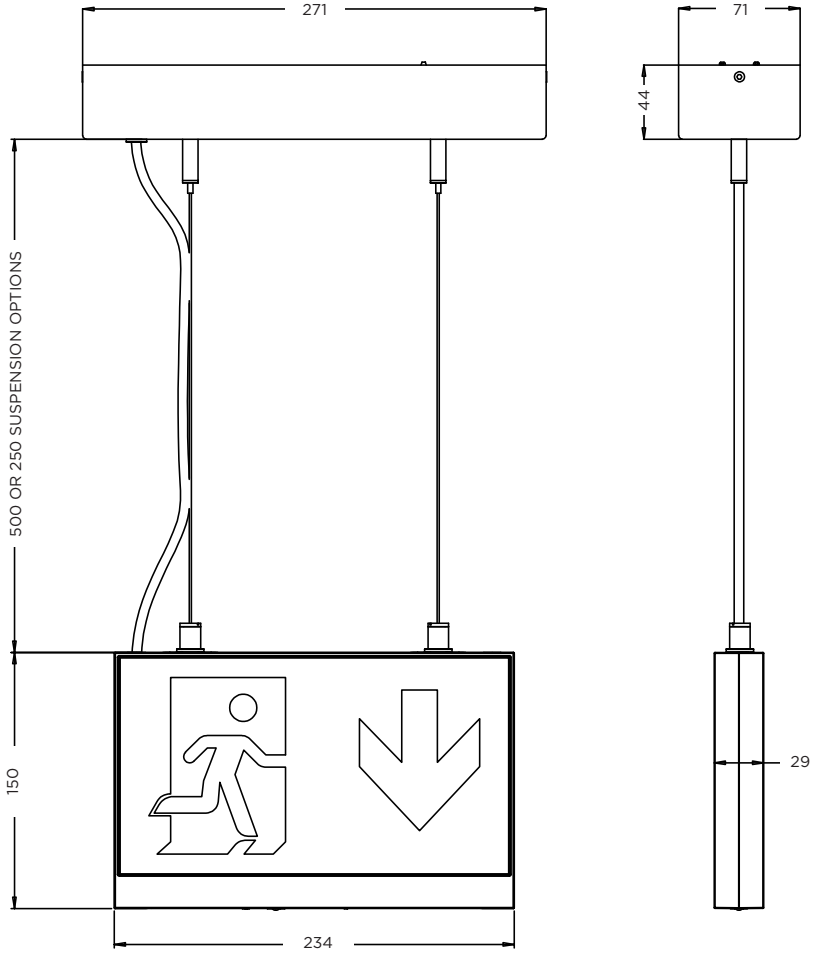

ION WIRE SUSPENDED

IP20

NM/MM

6 WARRANTY

KG 1.5

230v

1W

DALI

EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2



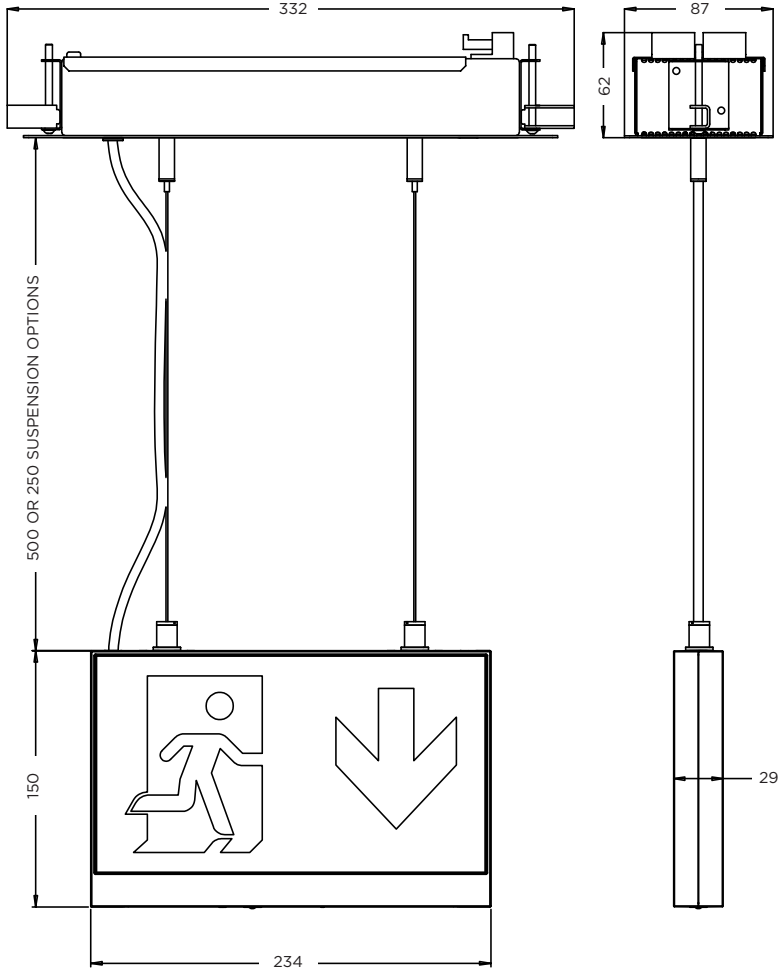

ION SUSPENDED

IP20 | NM/MM | 6 WARRANTY | KG 1.5 | 230v | 1W | DALI

EN 60598-1
EN60598-2-22
EN55015
EN61547
EN61000-3-2

EXAMPLE PRODUCT CODE		ION	C	S	R	500	LM	W	IS	S	U
FAMILY	ION	ION									
TYPE	CEILING	C									
MOUNT	SURFACE	S									
	RECESSED	R									
VERSION	SUSPENDED ROD	R									
	SUSPENDED WIRE	W									
LENGTH	500mm LENGTH**	500									
	250mm LENGTH**	250									
CONTROL	MAINS/CENTRAL BATTERY*	LA									
	DALI MAINS/CENTRAL BATTERY*	DA									
	MAINTAINED SELF-CONTAINED	LM									
	MAINTAINED DALI	DL									
	MAINTAINED SPECTO-XT	XT									
COLOUR	WHITE (RAL 9016)	W									
	BLACK (RAL9005)	K									
	GREY (RAL 9006)	G									
	PENNY BRONZE	V									
LEGEND TYPE	ISO 7010	IS									
LEGEND SIDE	SINGLE SIDED	S									
	DOUBLE SIDED	D									
ARROW DIRECTION	UP	U									
	DOWN	D									
	LEFT	L									
	RIGHT	R									

Example Code IONCSR500LMWISSU ION | Ceiling | Surface | Suspended Rod | 500mm Length | Maintained Self-Contained | White (RAL 9016) | ISO 7010 | Single SIded | Up Arrow

For more information on colours, please go to the **Finishes Page**.

*For input voltages please refer to our installation leaflets.

**Maximum suspension length is 500mm

ACCESSORIES (ORDERED SEPARATELY)	
Ceiling Reinforcement Panel	IONCRP