

TYKE RECESSED



IP20
IP40

6
WARRANTY

KG
0.4

230v

DALI

4W

NM



EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

DISCREET



SPOT



AREA



CORRIDOR+



CORNER



IP65




Self-Contained




Power Pack

Control Module

IP65




IP40

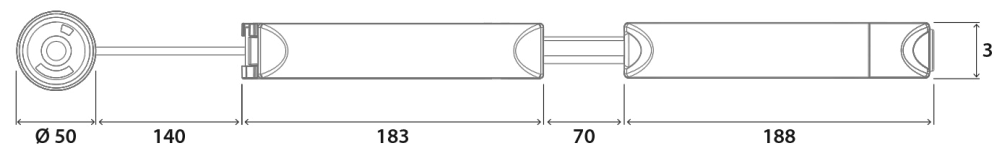

Cut-out - Ø41mm
Minimum void depth - 160mm

Central Battery

IP40

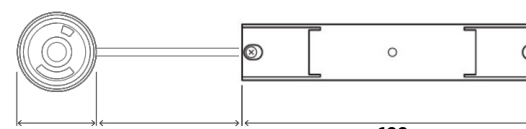

Cut-out - Ø41mm
Minimum void depth - 160mm

TYKE RECESSED



IP20
IP40

IP20
IP65



230v

DALI

4W



EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

EXAMPLE PRODUCT CODE			TYK	C	R	DC	DN	W
FAMILY	TYKE	TYK						
TYPE	CEILING	C						
MOUNT	RECESSED	R						
LENS	DISCREET ¹	DC						
	SPOT	SP						
	AREA	AR						
	CORRIDOR PLUS	CP						
	CORNER	CN						
CONTROL GEAR	MAINS/CENTRAL BATTERY ²	LA						
	NON-MAINTAINED SELF-CONTAINED	LN						
	DALI MAINS/CENTRAL BATTERY ²	DA						
	DALI NON-MAINTAINED SELF CONTAINED	DN						
	SPECTO-XT NON-MAINTAINED SELF CONAINTED	XT						
COLOUR	BLACK - RAL9005	K						
	WHITE - RAL9016	W						

Example Code TYKCRDCDNW Tyke | Ceiling | Recessed | Discreet | Dali Non-maintained Self Contained | White - RAL9016 Finish

For more information on colours, please go to the Finishes Page.

¹IP40 only. Not compatible with Specto-XT control gear.

²For input voltages please refer to our installation leaflets.

ACCESSORIES (ORDERED SEPARATELY)	
IP65 BEZEL - WHITE RAL9016 ³	TYKIP001W
IP65 BEZEL - BLACK RAL9005 ³	TYKIP001K

³IP40 with the discreet lens

LUMEN OUTPUT		
LENS	DISCREET	420lm
	AREA	415lm
	CORRIDOR PLUS	380lm
	CORNER	390lm
	SPOT	420lm

TYKE RECESSED



IP20
IP40

IP20
IP65

6
WARRANTY

KG
0.4

230v

DALI

4W

NM



EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

AREA

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	4.8	11.7	11.7	4.8	5.4	12.6	12.6	5.4
2.5	5.1	13.9	13.9	5.1	5.7	14.4	14.4	5.7
3.0	5.6	15.5	15.5	5.6	5.4	15.6	15.6	5.4
3.5	6.1	16.9	16.9	6.1	5.0	16.2	16.2	5.0
4.0	6.0	18.8	18.8	6.0	4.6	15.7	15.7	4.6
4.5	5.5	20.3	20.3	5.5	4.2	14.5	14.5	4.2

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

CORNER

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	2.5	4.5	4.1	2.5	6.5	16.3	10.7	4.3
2.5	2.7	4.9	4.4	2.7	6.9	17.8	12.0	4.8
3.0	2.7	5.2	4.5	2.7	6.0	18.8	13.1	5.2
3.5	2.7	5.8	4.7	2.7	6.1	18.8	14.1	5.4
4.0	2.8	6.4	5.1	2.8	6.3	18.5	15.0	5.6
4.5	2.7	6.8	5.5	2.7	6.5	17.6	15.7	5.6

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

CORRIDOR PLUS

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	2.9	6.2	4.4	2.9	8.1	19.7	7.8	3.3
2.5	3.4	7.0	4.8	3.4	6.4	21.9	8.8	3.6
3.0	3.5	7.8	5.4	3.5	5.0	21.3	9.6	3.9
3.5	3.7	7.9	6.4	3.7	4.3	18.3	10.3	4.2
4.0	4.0	8.1	7.5	4.0	4.0	15.6	10.8	4.4
4.5	4.2	8.3	8.2	4.2	3.8	12.4	11.4	4.7

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

TYKE RECESSED



DISCREET

IP20
IP40

IP20
IP65

6
WARRANTY

KG
0.4

230v

DALI

4W

NM



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	4.8	11.8	11.8	4.8	5.7	12.8	12.8	5.7
2.5	5.5	13.6	13.6	5.5	6.1	14.7	14.7	6.1
3.0	5.9	15.5	15.5	5.9	5.9	16.2	16.2	5.9
3.5	6.3	16.8	16.8	6.3	5.2	16.8	16.8	5.2
4.0	5.8	19.5	19.5	5.8	4.5	16.5	16.5	4.5
4.5	5.5	21.0	21.0	5.5	4.0	15.4	15.4	4.0

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

SPOT

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	2.5	6.3	6.3	2.5	2.3	5.8	5.8	2.3
2.5	2.7	6.8	6.8	2.7	2.6	6.4	6.4	2.6
3.0	2.7	7.4	7.4	2.7	3.0	6.9	6.9	3.0
3.5	3.1	7.6	7.6	3.1	3.3	7.6	7.6	3.3
4.0	3.2	8.0	8.0	3.2	3.5	8.2	8.2	3.5
4.5	3.6	8.2	8.2	3.6	3.8	8.8	8.8	3.8

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.