


TYKE TRACK




- IP20
- WARRANTY 6
- 230v
- 4W
- Icon: Person with lightning bolt
- Icon: Weight 1.5 KG
- DALI
- NM



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

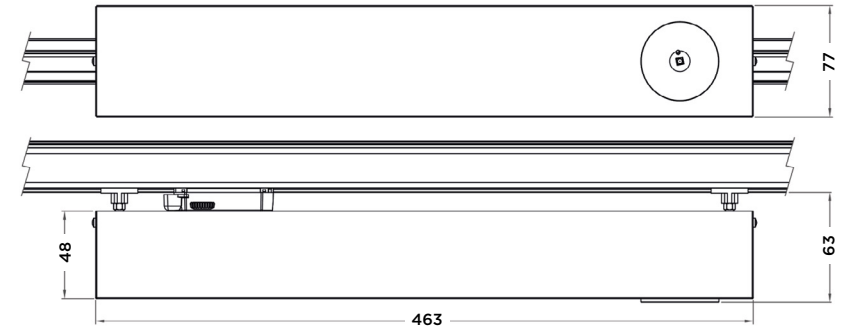

SPOT



AREA



CORRIDOR+



CORNER



DISCREET



TYKE TRACK



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

EXAMPLE PRODUCT CODE		TYK	C	T	DC	DN	W
FAMILY	TYKE	TYK					
TYPE	CEILING	C					
MOUNT	TRACK	T					
LENS	DISCREET ¹	DC					
	SPOT	SP					
	AREA	AR					
	CORRIDOR PLUS	CP					
	CORNER	CN					
CONTROL GEAR	MAINS/CENTRAL BATTERY ²	LA					
	NON-MAINTAINED SELF-CONTAINED	LN					
	DALI MAINS/CENTRAL BATTERY ²	DA					
	DALI NON-MAINTAINED SELF CONTAINED	DN					
	SPECTO-XT NON-MAINTAINED SELF CONAINTED	XT					
COLOUR	BLACK - RAL9005	K					
	GREY - RAL9006	G					
	WHITE - RAL9016	W					

Example Code TYKCTDCDNW Tyke | Ceiling | Track | Discreet | Dali Non-maintained Self Contained | White - RAL9016 Finish

For more information on colours, please go to the Finishes Page.

¹Not compatible with Specto-XT control gear.

²For input voltages please refer to our installation leaflets.

LUMEN OUTPUT		
LENS	DISCREET	420lm
	AREA	415lm
	CORRIDOR PLUS	380lm
	CORNER	390lm
	SPOT	420lm

TYKE TRACK



AREA

MOUNTING HEIGHT	0.5 LUX				1 LUX			
	2.0	4.8	11.7	11.7	4.8	5.4	12.6	12.6
2.5	5.1	13.9	13.9	5.1	5.7	14.4	14.4	5.7
3.0	5.6	15.5	15.5	5.6	5.4	15.6	15.6	5.4
3.5	6.1	16.9	16.9	6.1	5.0	16.2	16.2	5.0
4.0	6.0	18.8	18.8	6.0	4.6	15.7	15.7	4.6
4.5	5.5	20.3	20.3	5.5	4.2	14.5	14.5	4.2

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

CORNER

MOUNTING HEIGHT	0.5 LUX				1 LUX			
	2.0	2.5	4.5	4.1	2.5	6.5	16.3	10.7
2.5	2.7	4.9	4.4	2.7	6.9	17.8	12.0	4.8
3.0	2.7	5.2	4.5	2.7	6.0	18.8	13.1	5.2
3.5	2.7	5.8	4.7	2.7	6.1	18.8	14.1	5.4
4.0	2.8	6.4	5.1	2.8	6.3	18.5	15.0	5.6
4.5	2.7	6.8	5.5	2.7	6.5	17.6	15.7	5.6

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

CORRIDOR PLUS

MOUNTING HEIGHT	0.5 LUX				1 LUX			
	2.0	2.9	6.2	4.4	2.9	8.1	19.7	7.8
2.5	3.4	7.0	4.8	3.4	6.4	21.9	8.8	3.6
3.0	3.5	7.8	5.4	3.5	5.0	21.3	9.6	3.9
3.5	3.7	7.9	6.4	3.7	4.3	18.3	10.3	4.2
4.0	4.0	8.1	7.5	4.0	4.0	15.6	10.8	4.4
4.5	4.2	8.3	8.2	4.2	3.8	12.4	11.4	4.7

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

- IP20**
- 6 WARRANTY**
- 230v**
- 4W**
- 1.5 KG**
- DALI**
- NM**



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

TYKE TRACK



DISCREET

- IP20**
- 6** WARRANTY
- 1.5** KG
- 230v**
- DALI**
- 4W**
- NM**



- EN 60598-1
- EN60598-2-22
- EN55015
- EN61547
- EN61000-3-2

MOUNTING HEIGHT	0.5 LUX				1 LUX			
	2.0	4.8	11.8	11.8	4.8	5.7	12.8	12.8
2.5	5.5	13.6	13.6	5.5	6.1	14.7	14.7	6.1
3.0	5.9	15.5	15.5	5.9	5.9	16.2	16.2	5.9
3.5	6.3	16.8	16.8	6.3	5.2	16.8	16.8	5.2
4.0	5.8	19.5	19.5	5.8	4.5	16.5	16.5	4.5
4.5	5.5	21.0	21.0	5.5	4.0	15.4	15.4	4.0

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.

SPOT

MOUNTING HEIGHT	0.5 LUX				1 LUX			
	2.0	2.5	6.3	6.3	2.5	2.3	5.8	5.8
2.5	2.7	6.8	6.8	2.7	2.6	6.4	6.4	2.6
3.0	2.7	7.4	7.4	2.7	3.0	6.9	6.9	3.0
3.5	3.1	7.6	7.6	3.1	3.3	7.6	7.6	3.3
4.0	3.2	8.0	8.0	3.2	3.5	8.2	8.2	3.5
4.5	3.6	8.2	8.2	3.6	3.8	8.8	8.8	3.8

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.