

TYKE WALL RECESSED



EN 60598-1


EN60598-2-22

EN55015

EN61547


EN61000-3-2

Central Battery

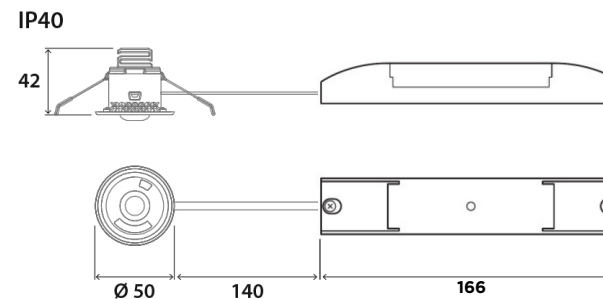

Cut-out - Ø41mm
Minimum void depth - 160mm

Self-Contained

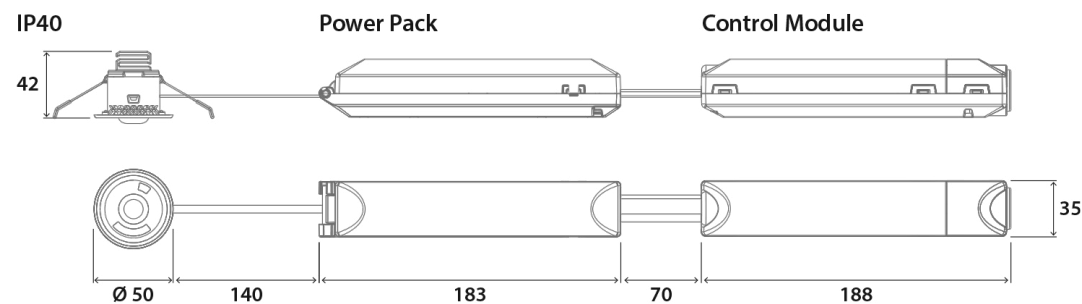

Cut-out - Ø41mm
Minimum void depth - 160mm

TYKE WALL RECESSED



EN 60598-1

EN60598-2-22

EN55015

EN61547

EN61000-3-2

EXAMPLE PRODUCT CODE			TYK	W	R	WL	DN	W
FAMILY	TYKE	TYK						
TYPE	WALL	W						
MOUNT	RECESSED	R						
LENS	WALL (380 Lumens)	WL						
CONTROL GEAR	MAINS/CENTRAL BATTERY ¹	LA						
	NON-MAINTAINED SELF-CONTAINED	LN						
	DALI MAINS/CENTRAL BATTERY ¹	DA						
	DALI NON-MAINTAINED SELF CONTAINED	DN						
	SPECTO-XT NON-MAINTAINED SELF CONAINTED	XT						
COLOUR	BLACK - RAL9005	K						
	WHITE - RAL9016	W						

Example Code TYKWRWLDNW Tyke | Wall | Recessed | Wall Lens | Dali Non-maintained Self Contained | White - RAL9016 Finish

For more information on colours, please go to the Finishes Page.

¹For input voltages please refer to our installation leaflets.

MOUNTING HEIGHT	0.5 LUX				1 LUX			
2.0	5.5	9.2	6.9	5.1	4.2	10.1	10.1	4.0
2.25	5.7	9.8	7.3	5.3	4.4	10.7	10.5	4.2
2.5	6.0	10.6	7.8	5.5	4.6	11.1	10.9	4.3
2.75	6.1	11.1	8.5	5.7	4.7	11.5	11.3	4.5
3.0	6.4	11.5	8.5	5.8	4.8	11.9	11.7	4.6

1 lux calculations are based on a 2m wide escape route with a border of 0.5m excluded either side.